

## ALUSIL

### ALUMINIUM SPRAY

#### CHARACTERISTICS

Base:	Pure aluminium paint in synthetic vehicle
Propellant:	Denatured and odourless hydrocarbon
Covering Power:	High
Dry film thickness:	15/20 micron
Dryness:	Rapid
Temperature of resistance:	High
Colour:	Metallic

#### PROPERTIES

- Resistant to abrasion
- Shining film layer
- Protect to oxidation

#### DESCRIPTION


ALUSIL is a spray product with elevated aluminum content. It is indicated for welding re-touches and to protect the aluminum parts from oxidation. It forms a film which restores and protects all aluminum surfaces. It can be painted or left as final protection.

#### INSTRUCTIONS OF USE

Clean and degrease the parts to treat. Shake continually the spray until the little ball is free to move and during the application continue occasionally to shake the product to keep it homogeneous. Spray at 25 cm distance. After the use overturn the aerosol and spray the product few seconds to dodge the obstruction of the valve.

#### PACKAGING

Spray Aerosol ml 400  
Box 12 Aerosol  
Product Code 13910/04

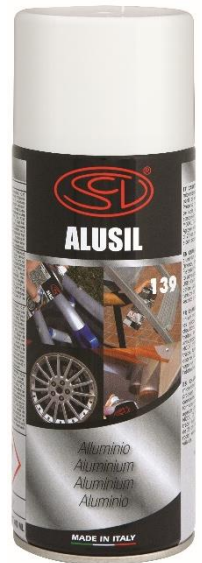

Revision date 01.08.2017

The information and recommendations contained in this document is offered in good faith based on our current knowledge and belief accurate at the date of publication. Nothing herein is to be considered as a warranty, express or otherwise. In all cases, it is the responsibility of the user to determine the applicability of such information or the suitability of any products for their own particular purpose with local legislation and for obtaining the necessary certifications and authorisations. Siliconi Commerciale's sole warranty is that the products will meet its sales specification. The manufacturer cannot be held responsible in case of damages caused by incorrect use of the product.

® indicates a Registered TradeMarks of Siliconi Commerciale. All Rights Reserved.

SILICONI COMMERCIALE® Technical data- sheet